

TORSIONALLY STIFF BELLOWS COUPLINGS 2 - 10,000 Nm

MODEL

FEATURES

BK1		with simple flange mounting from 15 - 10,000 Nm ▶ for adapting the metal bellows to custom drive components ▶ custom flange patterns available	Page 33
BK2		with clamping hub from 15 - 10,000 Nm ▶ easy to mount ▶ available in multiple lengths ▶ low moment of inertia	Page 34
BKH		with split clamping hub from 15 - 4,000 Nm ▶ radial mounting possible ▶ easy to install onto pre-aligned shafts ▶ low moment of inertia	Page 35
BKL		economy class with clamping hub from 2 - 500 Nm ▶ easy to mount ▶ optional self-opening clamp system ▶ low moment of inertia	Page 36
BKC		compact version with clamping hub from 15 - 500 Nm ▶ low moment of inertia ▶ compact design ▶ optional self-opening clamp system	Page 37

MODEL

FEATURES

BKM



**torsional stiff with clamping hub
from 20 - 1,000 Nm**

Page 38

- ▶ high torque density
- ▶ ultra compact
- ▶ lowest moment of inertia of all clamping hub designs

BKS



**welded with clamping hub
from 15 - 500 Nm**

Page 39

- ▶ all stainless steel construction
- ▶ temperatures up to 300°C
- ▶ easy to mount

BK3



**with conical clamping hub
from 15 - 10,000 Nm**

Page 40

- ▶ high clamping pressure
- ▶ modern design for removal system
- ▶ highly reliable

SP3



**with external clamping ring
from 60 - 10,000 Nm**

Page 41

- ▶ highly concentric symmetrical design
- ▶ very true running to the shaft axis
- ▶ for high speed applications

BK4



**for tapered shafts
from 15 - 150 Nm**

Page 42

- ▶ standard 1:10 taper with feather keyway
- ▶ special designs on request

TORSIONALLY STIFF BELLOWS COUPLINGS SIZES FROM 2 - 10,000 Nm

MODEL	FEATURES	
BK5 	with clamping hub and blind mate connection from 15 - 1,500 Nm ▶ backlash free with two piece design ▶ easy installation and removal ▶ available as separate components	Page 43
BK6 	with conical clamping ring and blind mate connection from 15 - 1,500 Nm ▶ eliminates need for screw access holes ▶ self centering hubs for highly concentric mounting ▶ easy installation and removal	Page 44
BK7 	with expanding shaft from 15 - 300 Nm ▶ for hollow shaft mounting ▶ save space and cost ▶ solution for mismatched shaft/bore diameters	Page 45
BK8 	with ISO flange mounting from 50 - 2,600 Nm ▶ for flange output gearboxes ▶ allows for continuous hollow through axis with some right angle gearbox designs ▶ compact layout	Page 46

BK1

WITH FLANGE MOUNTING

15 - 10,000 Nm

PROPERTIES

FEATURES

- For simple flange mounting to special drive components
- custom flange patterns available


MATERIAL

- **Bellows:** high grade stainless steel

- **Hubs:** steel

DESIGN

Two mounting flanges concentrically assembled to the flexible bellows.
Brief overloads of up to 1.5x the rated torque are acceptable.

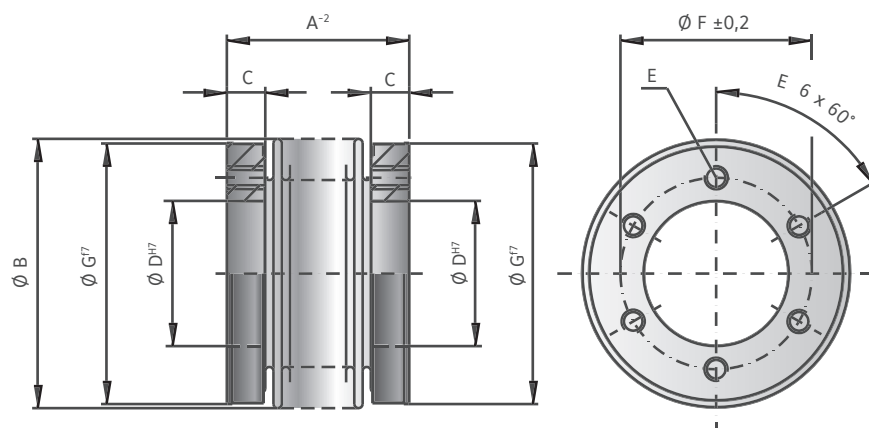

MODEL BK1

SIZE		15	30	60	150	200	300	500	800	1500	4000	6000	10000
Rated torque (Nm)	T _{KN}	15	30	60	150	200	300	500	800	1500	4000	6000	10000
Overall length (mm)	A²	30 37	36 44	43 53	50 62	53 65	56 70	64 77	81	100	145	138	150
Outside diameter of bellows (mm)	B	49	55	66	81	90	110	124	133	157	200	253	303
Fit length/thread depth (mm)	C	7.5	10	11	13	14.5	15	16	18	22	30	30	36
Inside diameter H7 (mm)	D	25	28	38	50	58	65	70	75	85	100	145	190
Fastening threads	E	6 x M5	6 x M5	6 x M6	6 x M6	6 x M6	6 x M8	6 x M8	6 x M10	6 x M16	6 x M20	8 x M20	8 x M24
Bolt circle diameter ± 0.2 (mm)	F	35	37	46	62	70	80	94	90	110	140	190	234
Outside diameter f7 (mm)	G	49	55	66	81	90	110	122	116	140	182	235	295
Moment of inertia (10⁻³ kgm²)	J _{ges}	0.07 0.08	0.14 0.15	0.30 0.32	0.90 0.95	1.30 1.40	1.95 2.10	3.0 3.4	4.3	10.6	46	132	350
Approximate weight (kg)		0.15	0.2	0.3	0.6	0.8	1.35	1.8	1.9	3.3	8.9	13.9	23.7
Torsional stiffness (10³ Nm/rad)	C _r	20 15	39 28	76 55	175 110	191 140	450 350	510 500	780	1304	3400	5700	10950
Axial ± (mm)	Max. values	1 2	1 2	1.5 2	2 3	2 3	2.5 3.5	2.5 3.5	3.5	3.5	3.5	3	3
Lateral ± (mm)		0.15 0.2	0.2 0.25	0.2 0.25	0.2 0.25	0.25 0.3	0.25 0.3	0.3 0.35	0.35	0.35	0.4	0.4	0.4
Angular ± (degree)		1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1.5	1.5	1.5	1.5	1.5
Axial spring stiffness (N/mm)	C _s	25 15	50 30	72 48	82 52	90 60	105 71	70 48	100	320	565	1030	985
Lateral spring stiffness (N/mm)	C _r	475 137	900 270	1200 420	1550 435	2040 610	3750 1050	2500 840	2000	3600	6070	19200	21800

ORDERING EXAMPLE	BK1	150	62	XX
Model	●			Special designation only (e.g. high speed balancing).
Size		●		
Overall length mm			●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK1 / 150 / 62 / XX; XX=finely balanced for 25.000 rpm)				

BK2

WITH CLAMPING HUB

15 - 10,000 Nm

PROPERTIES



FEATURES

- easy to mount
- Optional: bolt tensioning system in size 800 and up
- light weight and low moment of inertia

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table


DESIGN

Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

NEW

Advantage:

reduce screw tightening torques by up to 90% by using multiple smaller screws to create the same tension.

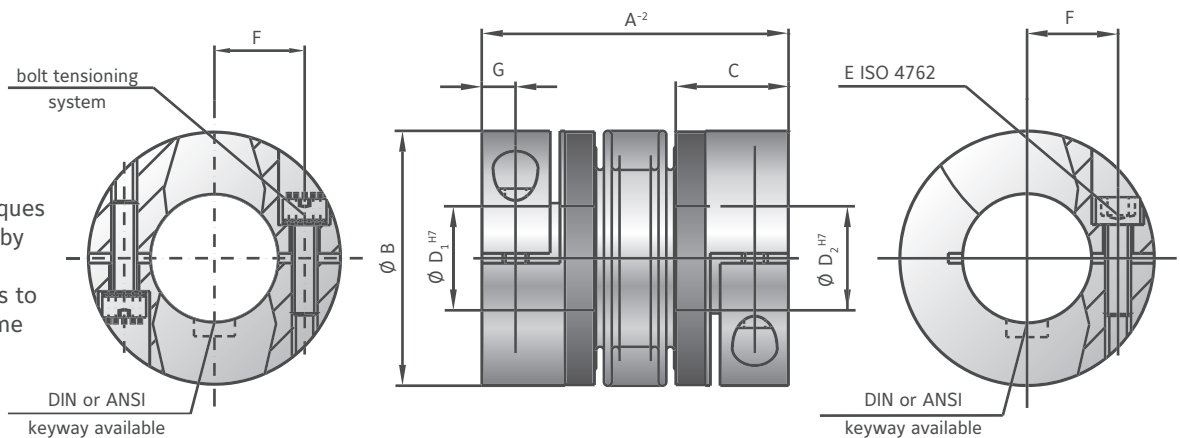

MODEL BK2

SIZE		15			30			60			80			150			200			300			500			800		1500		4000		6000		10000		
Rated torque	(Nm)	T _{KN}	15			30			60			80			150			200			300			500			800		1500		4000		6000		10000	
Overall length	(mm)	A ⁻²	59	66	99	69	77	113	83	93	130	94	106	143	95	107	144	105	117	163	111	125	200	133	146	169	140	179	166	230	225	252	288			
Outside diameter	(mm)	B	49			55			66			81			81			90			110			124			134		157		200		253		303	
Fit length	(mm)	C	22			27			31			36			36			41			43			51			45		55		85		107		129	
Inside diameter possible from Ø to Ø H7	(mm)	D ₁ /D ₂	8-28			10-30			12-35			14-42			19-42			22-45			24-60			35-60			40-75		50-80		50-90		60-140		70-180	
Fastening screw ISO 4762		E	M5			M6			M8			M10			M10			M12			M12			M16			2x M16*		2x M20*		2x M24*		2x M24*		2x M30*	
Tightening torque of the fastening screw	(Nm)		8			15			40			50			70			120			130			200			250		470		1200		1200		2400	
Distance between centerlines	(mm)	F	17			19			23			27			27			31			39			41			2x48		2x55		2x65		2x90		2x117	
Distance	(mm)	G	6.5			7.5			9.5			11			11			12.5			13			16.5			18		22.5		28		35		42	
Moment of inertia (10 ⁻³ kgm²)		J _{ges}	0.06	0.07	0.08	0.12	0.13	0.14	0.32	0.35	0.4	0.8	0.85	0.9	1.9	2	2.1	3.2	3.4	3.6	7.6	7.9	8.3	14.3	14.6	14.8	16.2	17	43	45	165	495	1214			
Hub material			Al optional steel			Al optional steel			Al optional steel			Al optional steel			steel optional AL			steel optional AL			steel optional AL			steel optional AL			steel		steel		steel		steel		steel	
Approximate weight (kg)			0.16			0.26			0.48			0.8			1.85			2.65			4			6.3			5.7		11.5		28.8		49.4		80.9	
Torsional stiffness (10 ³ Nm/rad)		C _T	20	15	14	39	28	27	76	55	54	129	85	84	175	110	97	191	140	135	450	350	340	510	500	400	780	711	1304	1180	3400	5700	10950			
Axial ± (mm)		Max. values	1	2	3	1	2	3	1.5	2	3	2	3	4	2	3	4	2	3	4	2.5	3.5	4.5	2.5	3.5	4.5	3.5	4.5	3.5	4.5	3.5	3	3			
Lateral ± (mm)			0.15	0.2	1	0.2	0.25	1	0.2	0.25	1	0.2	0.25	1	0.2	0.25	1	0.25	0.3	1	0.25	0.3	1	0.3	0.35	1	0.35	1	0.35	1	0.4	0.4	0.4			
Angular ± (degree)			1	1.5	2	1	1.5	2	1	1.5	2	1	1.5	2	1	1.5	2	1	1.5	2	1	1.5	2	1	1.5	2	1.5	2	1.5	2	1.5	1.5	1.5			
Axial spring stiffness (N/mm)		C _a	25	15	84	50	30	118	72	48	165	48	32	144	82	52	130	90	60	280	105	71	605	70	48	85	100	285	320	440	565	1030	985			
Lateral spring stiffness (N/mm)		C _r	475	137	140	900	270	224	1200	420	337	920	290	401	1550	435	500	2040	610	750	3750	1050	1200	2500	840	614	2000	1490	3600	1700	6070	19200	21800			

* 180° opposed in each clamping hub.



PROPERTIES

FEATURES


- radial mounting possible
- easy installation onto pre-aligned shafts
- low moment of inertia

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

DESIGN

Two split clamping hubs with two screws in each. Brief overloads of up to 1.5x the rated torque are acceptable.

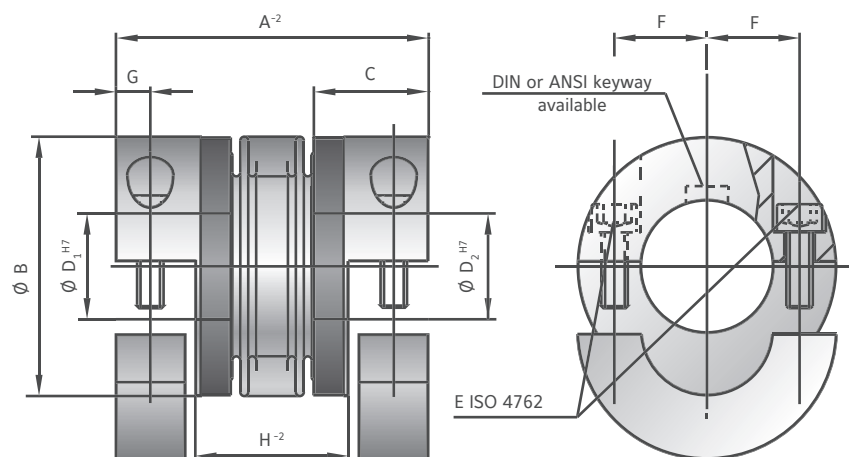

MODEL BKH

SIZE		15	30	60	80	150	200	300	500	800	1500	4000
Rated torque (Nm)	T_{KN}	15	30	60	80	150	200	300	500	800	1500	4000
Overall length (mm)	A^{-2}	59 66	69 77	83 93	94 106	95 107	105 117	111 125	133 146	140 166	166 225	225
Outside diameter (mm)	B	49	55	66	81	81	90	110	124	134	157	200
Fit length (mm)	C	22	27	31	36	36	41	43	51	45	55	85
Inside diameter possible from $\emptyset$ to $\emptyset$ H7 (mm)	D_1/D_2	8-28	10-30	12-35	14-42	19-42	22-45	24-60	35-60	40-75	50-80	50-90
Fastening screw ISO 4762		M5	M6	M8	M10	M10	M12	M12	M16	M16	M20	M24
Tightening torque of the fastening screw (Nm)	E	8	15	40	50	70	120	130	200	250	470	1200
Distance between centerlines (mm)	F	17.5	19	23	27	27	31	39	41	48	55	65
Distance (mm)	G	7	7.5	9.5	12	12	12.5	14	16.5	18	22.5	28
Distance (mm)	H^{-2}	29 36	35 43	41 51	47 59	48 60	50 62	55 69	61 75	65.5 71	71 109	109
Moment of inertia (10^{-3} kgm ²)	J_{res}	0.07 0.08	0.14 0.15	0.23 0.26	0.65 0.67	2.5 3.2	4.5 5.4	8.5 10.5	17.3 19.6	24.3 29.2	49.2 60.7	165
Hub material		Al optional steel	Al optional steel	Al optional steel	Al optional steel	steel optional AL	steel optional AL	steel optional AL	steel optional AL	steel	steel	steel
Approximate weight (kg)		0.15	0.3	0.4	0.8	1.7	2.5	4	7.5	7	12	28
Torsional stiffness (10^3 Nm/rad)	C_T	20 15	39 28	76 55	129 85	175 110	191 140	450 350	510 500	780 780	1304 1304	3400
Axial $\pm$ (mm)	Max. values	1 2	1 2	1.5 2	2 3	2 3	2 3	2.5 3.5	2.5 3.5	3.5 3.5	3.5 3.5	3.5
Lateral $\pm$ (mm)		0.15 0.2	0.2 0.25	0.2 0.25	0.2 0.25	0.2 0.25	0.25 0.3	0.25 0.3	0.3 0.35	0.35 0.35	0.35 0.35	0.4
Angular $\pm$ (degree)		1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1.5 1.5	1.5 1.5	1.5
Axial spring stiffness (N/mm)	C_a	25 15	50 30	72 48	48 32	82 52	90 60	105 71	70 48	100 100	320 320	565
Lateral spring stiffness (N/mm)	C_r	475 137	900 270	1200 420	920 290	1550 435	2040 610	3750 1050	2500 840	2000 2000	3600 3600	6070

ORDERING EXAMPLE	BK2 / BKH	80	94	20	22.23	XX
Model	●					Special designation only (e.g. anodized hubs).
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKH / 80 / 94 / 20 / 22.23 / XX; XX=finely balanced for 25,000 rpm)						

BKL

WITH CLAMPING HUB

2 – 500 Nm



PROPERTIES

FEATURES

- easy to mount
- light weight and low moment of inertia


Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

DESIGN

Optional: self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

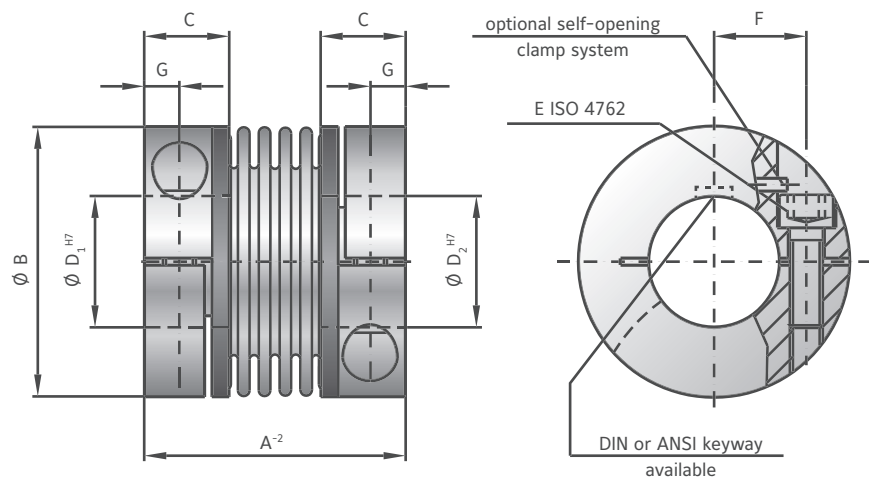

MODEL BKL

SIZE		2	4.5	10	15	30	60	80	150	300	500
Rated torque (Nm)	T_{KN}	2	4.5	10	15	30	60	80	150	300	500
Overall length (mm)	A^{-2}	30	40	44	58	68	79	92	92	109	114
Outside diameter (mm)	B	25	32	40	49	56	66	82	82	110	123
Fit length (mm)	C	10	13	13	21.5	26	28	32.5	32.5	41	42.5
Inside diameter possible from $\emptyset$ to $\emptyset$ H7 (mm)	$D_{1/2}$	4-12.7	6-16	6-24	8-28	10-32	14-35	16-42	19-42	24-60	35-62
Fastening screw ISO 4762	E	M3	M4	M4	M5	M6	M8	M10	M10	M12	M16
Tightening torque of the fastening screw (Nm)		2.3	4	4.5	8	15	40	70	85	120	200
Distance between centerlines (mm)	F	8	11	14	17	20	23	27	27	39	41
Distance (mm)	G	4	5	5	6.5	7.5	9.5	11	11	13	17
Moment of inertia (10^{-3} kgm ²)	J_{ges}	0.002	0.007	0.016	0.065	0.12	0.3	0.75	1.8 0.8	7.5 3.1	11.7 4.9
Hub material		AL optional steel	AL optional steel	AL optional steel	AL optional steel	AL optional steel	AL optional steel	AL optional steel	steel optional AL	steel optional AL	steel optional AL
Approximate weight (kg)		0.02	0.05	0.06	0.16	0.25	0.4	0.7	1.7 0.75	3.8 1.6	4.9 2.1
Torsional stiffness (10^3 Nm/rad)	C_T	1.5	7	9	23	31	72	80	141	157	290
Axial $\pm$ (mm)	Max. values	0.5	1	1	1	1	1.5	2	2	2	2.5
Lateral $\pm$ (mm)		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Angular $\pm$ (degree)		1	1	1	1	1	1	1	1	1	1
Axial spring stiffness (N/mm)	C_a	8	35	30	30	50	67	44	77	112	72
Lateral spring stiffness (N/mm)	C_r	50	350	320	315	366	679	590	960	2940	1450

ORDERING EXAMPLE	BKL	80	26	22.23	XX
Model	●				Special designation only (e.g. anodized hubs).
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKL / 80 / 26 / 22.23 / XX; XX=finely balanced for 25.000 rpm)					



PROPERTIES

FEATURES

- for space restricted installations
- light weight and low moment of inertia
- easy to mount


MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

DESIGN

Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

Optional: self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

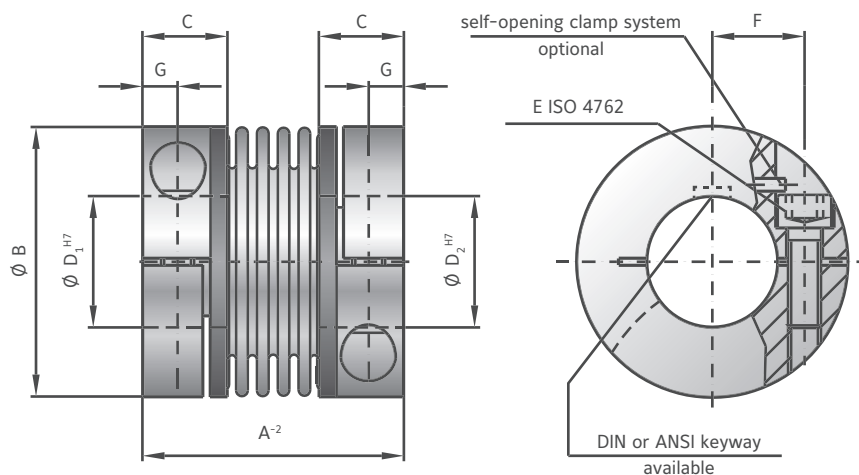

MODEL BKC

SIZE			15	30	60	150	300	500
Rated torque	(Nm)	T_{KN}	15	30	60	150	300	500
Overall length	(mm)	A^{-2}	48	58	67	78	94	100
Outside diameter	(mm)	B	49	56	66	82	110	123
Fit length	(mm)	C	16.5	21	23	27.5	34	34
Inside diameter possible from $\emptyset$ to $\emptyset$ H7	(mm)	D_1/D_2	8-28	12-32	14-35	19-42	24-60	32-75
Fastening screw ISO 4762		E	M5	M6	M8	M10	M12	M12
Tightening torque of the fastening screw	(Nm)		8	15	40	75	120	125
Distance between centerlines	(mm)		17.5	20	23	27	39	45
Distance	(mm)	G	6.5	7.5	9.5	11	13	13
Moment of inertia	(10^{-3} kgm ²)	$J_{ges.}$	0.05	0.1	0.26	0.65	6.3	9
Hub material			AL	AL	AL	AL	steel	steel
Approximate weight	(kg)		0.13	0.21	0.37	0.72	3.26	3.52
Torsional stiffness	(10^3 Nm/rad)	C_T	23	31	72	141	157	290
Axial	$\pm$ (mm)	Max. values	1	1	1.5	2	2	2.5
Lateral	$\pm$ (mm)		0.2	0.2	0.2	0.2	0.2	0.2
Angular	$\pm$ (degree)		1	1	1	1	1	1
Axial spring stiffness	(N/mm)	C_a	30	50	67	77	112	72
Lateral spring stiffness	(N/mm)	C_r	315	366	679	960	2940	2200
Speed max. with balancing	(min ⁻¹)		80,000	70,000	60,000	50,000	40,000	30,000

ORDERING EXAMPLE	BKC	60	26	22.23	XX
Model	●				Special designation only (e.g. special bore tolerance).
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKC / 60 / 26 / 22.23 / XX; XX=finely balanced for 25,000 rpm)

PROPERTIES

FEATURES

- ▶ extremely compact
- ▶ high torque density
- ▶ high torsional stiffness




MATERIAL

- ▶ **Bellows:** high grade stainless steel
- ▶ **Hubs:** see table

DESIGN

Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

Key application:
For mounting on a torque transducer.

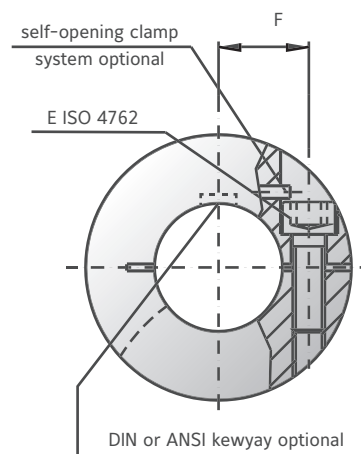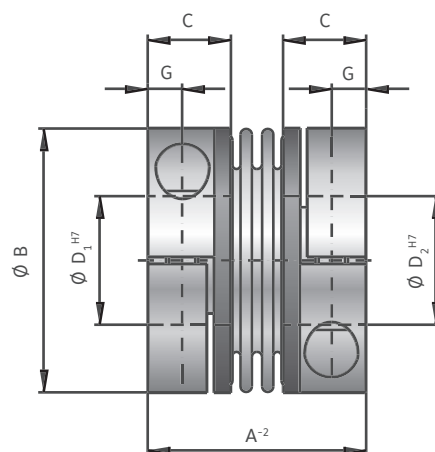

MODEL BKM

SIZE			20	200	400	1000
Rated torque (Nm)	T_{KN}		20	200	400	1000
Overall length (mm)	A^{-2}		40	59	75	89
Outside diameter (mm)	B		49	66	82	110
Fit length (mm)	C		16.5	23	27.5	34
Inside diameter possible from $\varnothing$ to $\varnothing$ H7 (mm)	$D_{1/2}$		15-28	24-35	32-42	40-60
Fastening screw ISO 4762	E		M5	M8	M10	M12
Tightening torque of the fastening screw (Nm)			8	40	60	130
Distance between centerlines (mm)	F		17	23	27	39
Distance (mm)	G		6	9.5	11	13
Moment of inertia (10^{-3} kgm^2)	$J_{ges.}$		0.05	0.18	0.62	7.2
Hub material			AL	AL	AL	steel
Approximate weight (kg)			0.13	0.4	0.7	3.5
Torsional stiffness (10^3 Nm/rad)	C_t		41.9	138	170	570
Axial $\pm$ (mm)	Max. values		1	1.5	1	2
Lateral $\pm$ (mm)			0.06	0.08	0.1	0.1
Angular $\pm$ (degree)			0.5	0.5	0.5	0.5
Axial spring stiffness (N/mm)	C_s		55.8	153	114	148
Lateral spring stiffness (N/mm)	C_r		3,710	11,000	6,058	9,010
Speed max. with balancing (min^{-1})			80,000	60,000	50,000	40,000

ORDERING EXAMPLE	BKM	20	20	19.05	XX
Model	●				Special designation only (e.g. special bore tolerance).
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKM / 20 / 20 / 19.05 / XX; XX=finely balanced for 25,000 rpm)					



PROPERTIES

FEATURES

- for high temperatures and aggressive media
- compact design
- welded version

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** high grade stainless steel


- **Screws:** Grade 12.9 Geomet coated (alternate materials on request)

DESIGN

Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable. From -40° to +300°C operating temperature.

Optional:

self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

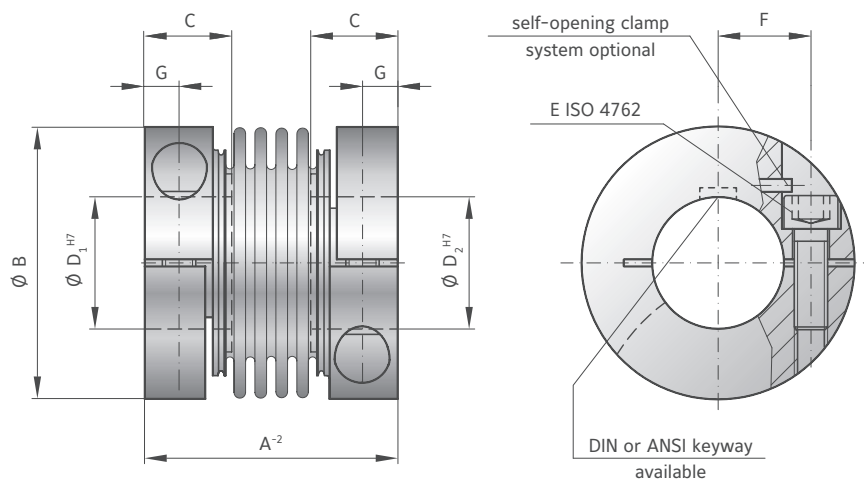

MODEL BKS

SIZE			15	30	60	150	300	500
Rated torque	(Nm)	T_{KN}	15	30	60	150	300	500
Overall length	(mm)	A^{-2}	45	52	66	76	89	95
Outside diameter	(mm)	B	49	56	66	82	110	123
Fit length	(mm)	C	17	20	24	30	34	35
Inside diameter* possible from $\emptyset$ to $\emptyset$ H7	(mm)	D_1/D_2	12-28	14-32	16-35	19-42	24-60	32-75
Fastening screw ISO 4762		E	M5	M6	M8	M10	M12	M12
Tightening torque of the fastening screw	(Nm)		8	15	40	75	120	125
Distance between centerlines	(mm)	F	17.5	20	23	27	39	45
Distance	(mm)	G	6	7.5	9.5	11	13	13
Moment of inertia	(10^{-3} kgm ²)	$J_{ges.}$	0.1	0.2	0.53	1.5	5.5	8.1
Approximate weight	(kg)		0.27	0.42	0.78	1.5	2.9	3.5
Torsional stiffness	(10^3 Nm/rad)	C_T	23	31	72	141	157	290
Axial	± (mm)	Max. values	1	1	1.5	2	2	2.5
Lateral	± (mm)		0.2	0.2	0.2	0.2	0.2	0.2
Angular	± (degree)		1	1	1	1	1	1
Axial spring stiffness	(N/mm)	C_a	30	50	67	77	112	72
Lateral spring stiffness	(N/mm)	C_r	315	366	679	960	2940	2200
Speed max. with balancing	(min ⁻¹)		60,000	50,500	50,000	40,500	40,000	30,000

* Smaller bore diameter available at reduced torque capacity

ORDERING EXAMPLE	BKS	15	20	19.05	XX
Model	●				Special designation only (e.g. special bore tolerance).
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKS / 15 / 20 / 19.05 / XX; XX=finely balanced for 25,000 rpm)					

BK3

WITH CONICAL CLAMPING SYSTEM

15 – 10,000 Nm

PROPERTIES

FEATURES


- high clamping pressure
- high torque version
- compact design

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** steel

DESIGN

Two conical clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

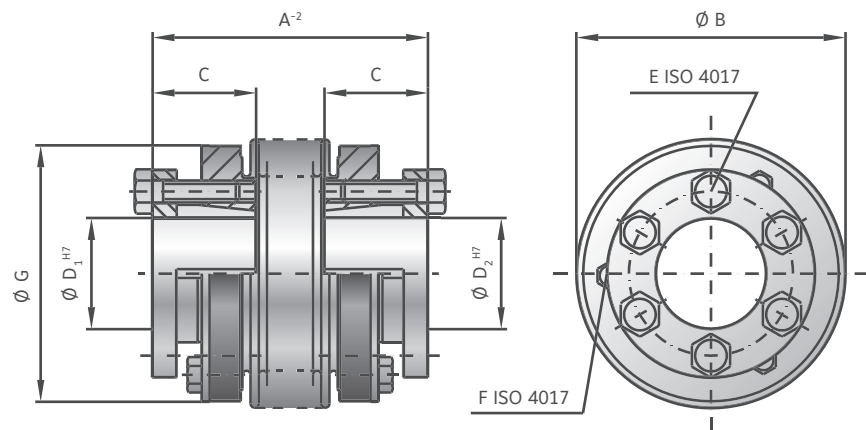

MODEL BK3

SIZE		15	30	60	150	200	300	500	800	1500	4000	6000	10000
Rated torque (Nm)	T_{KN}	15	30	60	150	200	300	500	800	1500	4000	6000	10000
Overall length (mm)	A^{-2}	48 55	57 65	66 76	75 87	78 90	89 103	97 110	114	141	195	210	217
Outside diameter (mm)	B	49	55	66	81	90	110	124	133	157	200	253	303
Fit length (mm)	C	19	22	27	32	32	41	41	50	61	80	85	92
Inside diameter possible from $\varnothing$ to $\varnothing$ H7 (mm)	$D_{1/2}$	10-22	12-23	12-29	15-38	15-44	24-56	24-60	30-60	35-70	50-100	60-140	70-180
Fastening screw ISO 4017	E	6 x M4	6 x M5	6 x M5	6 x M6	6 x M6	6 x M8	6 x M8	6 x M10	6 x M12	6 x M16	6 x M16	8 x M16
Tightening torque of the fastening screw (Nm)		4	6	8	12	14	18	25	40	70	120	150	160
Jack screw ISO 4017	F	3 x M4	3 x M4	3 x M5	3 x M5	3 x M6	3 x M6	3 x M6	3 x M8	6 x M8	6 x M10	6 x M10	4 x M10
Outside diameter of hub (mm)	G	49	55	66	81	90	110	122	116	135	180	246	295
Moment of inertia (10^{-3} kgm ²)	J_{ges}	0.07 0.08	0.15 0.16	0.39 0.41	1.2 1.6	1.7 2.5	5.1 5.9	9.1 9.9	13.2	34.9	85.5	254	629
Approximate weight (kg)		0.25	0.4	0.8	1.2	1.8	3	4.2	5.6	8.2	23	32.6	45.5
Torsional stiffness (10^3 Nm/rad)	C_T	20 15	39 28	76 55	175 110	191 140	450 350	510 500	780	1304	3400	5700	10950
Axial $\pm$ (mm)	Max. values	1 2	1 2	1.5 2	2 3	2 3	2.5 3.5	2.5 3.5	3.5	3.5	3.5	3	3
Lateral $\pm$ (mm)		0.15 0.2	0.2 0.25	0.2 0.25	0.2 0.25	0.25 0.3	0.25 0.3	0.3 0.35	0.35	0.35	0.4	0.4	0.4
Angular $\pm$ (degree)		1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1.5	1.5	1.5	1.5	1.5
Axial spring stiffness (N/mm)	C_a	25 15	50 30	72 48	82 52	90 60	105 71	70 48	100	320	565	1030	985
Lateral spring stiffness (N/mm)	C_r	475 137	900 270	1200 420	1500 435	2040 610	3750 1050	2500 840	2000	3600	6070	19200	21800

ORDERING EXAMPLE	BK3	60	76	20	22.23	XX
Model	●					Special designation only (e.g. non-standard bore tolerance)
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK3 / 60 / 76 / 20 / 22.23 / XX; XX=K6 bore tolerance on D1)						

SP3

WITH EXTERNAL CLAMPING RING

60 – 10,000 Nm

NEW



High speed

PROPERTIES

FEATURES

- ▶ very high balancing quality due to symmetrical design
- ▶ high operating speeds
- ▶ extremely smooth running

MATERIAL


- ▶ **Bellows:** high grade stainless steel
- ▶ **Hubs and clamping ring:** steel

DESIGN

Two precision machined clamping ring hubs mounted concentrically to a flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

FIT CLEARANCE

Overall shaft / hub tolerance
0.01 – 0.025 mm

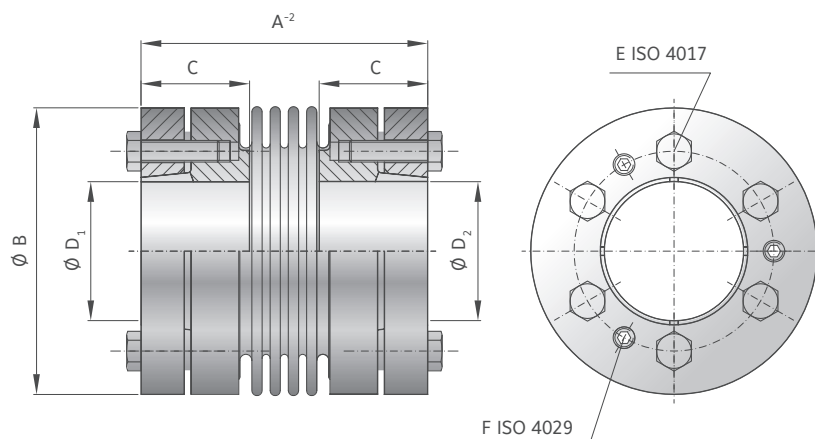

MODELL SP3

SERIE			60		150		200		300		500		800	1500	4000	6000	10000
Rated torque	(Nm)	T _{KN}	60		150		200		300		500		800	1,500	4,000	6,000	10,000
Overall length	(mm)	A ⁻²	66	76	75	87	76	88	89	103	97	111	117	133	195	250	300
Outside diameter	(mm)	B	66		81		90		110		124		133	157	200	253	300
Fit length	(mm)	C	25		30		32		36		40		40	53	65	86	95
Inside diameter possible from Ø to Ø H7	(mm)	D ₁ /D ₂	14-32		18-35		20-42		22-55		25-60		32-60	42-75	50-100	60-140	70-180
Fastening screw ISO 4017		E	6 x M5		6 x M6		6 x M6		6 x M8		6 x M8		6 x M10	6 x M10	6 x M12	6 x M16	8 x M16
Tightening torque of the fastening screw	(Nm)		8.5		14		14		30		35		50	60	120	260	295
Jack screw ISO 4017		F	3 x M5		3 x M6		3 x M6		3 x M8		3 x M8		3 x M10	3 x M10	3 x M12	3 x M16	4 x M16
Moment of inertia	(10 ⁻³ kgm²)	J _{ges}	0.58	0.60	1.6	1.62	2.42	2.52	6.38	6.56	10.35	10.67	10.9	24.3	107.9	466.2	1187.4
Approximate weight	(kg)		0.9	0.92	1.7	1.8	2.1	2.2	3.52	3.6	4.73	4.83	4.9	7.9	19.0	45.0	80.5
Torsional stiffness	(10 ³ Nm/rad)	C _T	76	55	175	110	191	140	450	350	510	500	780	1,304	3,400	5,700	10,950
Axial	± (mm)	max. values	1.5	2	2	3	2	3	2.5	3.5	2.5	3.5	3.5	3.5	3.5	3.0	3.0
Lateral	± (mm)		0.2	0.25	0.2	0.25	0.25	0.3	0.25	0.3	0.3	0.35	0.35	0.35	0.4	0.4	0.4
Angular	± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5	1.5	1.5	1.5	1.5
Axial spring stiffness	(N/mm)	C _a	72	48	82	52	90	60	105	71	70	48	100	320	565	1,030	985
Lateral spring stiffness	(N/mm)	C _l	1,200	420	1,500	435	2,040	610	3750	1,050	2,500	840	2,000	3,600	6,070	19,200	21,800
Speed standard	(min ⁻¹)	n	22,500		16,500		16,500		13,500		12,500		10,000	8,000	6,000	5,000	3,000

* Recommended fit pairing H7 / k6; H6 / j5 (short spindle); starting at $\emptyset$ 55 G7 / m6

ORDERING EXAMPLE	SP3	150	87	20	32	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	

Special designation only
(e.g. non-standard bore tolerance)

For custom features place an XX at the end of the part number and describe the special requirements (e.g. SP3 / 150 / 87 / 20 / 32 / XX)

BK4

FOR TAPERED SHAFTS

15 – 150 Nm

PROPERTIES

FEATURES


- for tapered shafts
- easy to mount and dismount
- high installed concentricity

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** steel

DESIGN

Conical clamping system opposite 1:10 tapered bore with feather keyway. Brief overloads of up to 1.5x the rated torque acceptable.

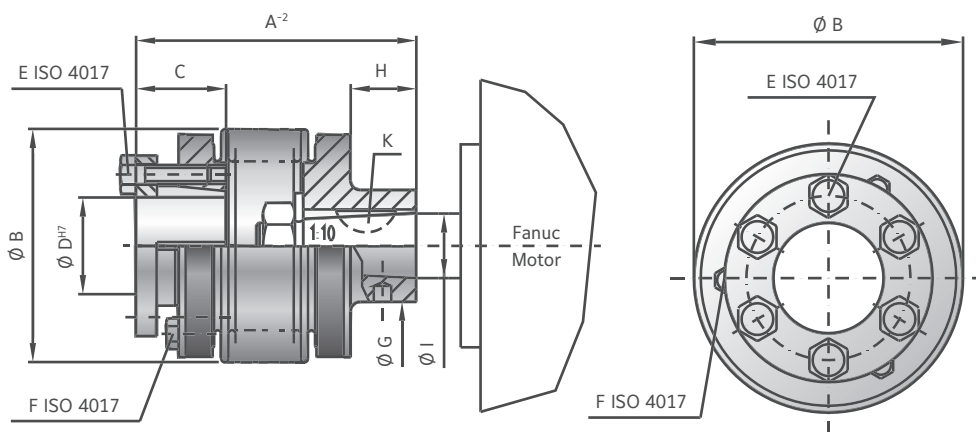

MODEL BK4

SIZE			15		30		60		150	
Rated torque	(Nm)	T_{KN}	15		30		60		150	
Overall length	(mm)	A^{-2}	47	54	68	76	72	82	82	94
Outside diameter	(mm)	B	49		55		66		81	
Fit length	(mm)	C	19		22		27		32	
Inside diameter possible from Ø to Ø H7	(mm)	D	10-22		12-23		12-29		15-37	
Fastening screw ISO 4017		E	6 x M4		6 x M5		6 x M5		6 x M6	
Tightening torque of the fastening screw	(Nm)		4		6		8		12	
Jack screw ISO 4017		F	3 x M4		3 x M4		3 x M5		3 x M5	
Outside diameter of hub	(mm)	G	20		27		30		30	
Hub length	(mm)	H	8.5		22		18		20	
Moment of inertia	(10 ⁻³ kgm ²)	J_{ges}	0.10	0.12	0.22	0.27	0.58	0.61	1.1	1.4
Approximate weight	(kg)		0.25		0.4		0.8		1.35	
Torsional stiffness	(10 ³ Nm/rad)	C_T	20	15	39	28	76	55	175	110
Axial	± (mm)	Max. values	1	2	1	2	1.5	2	2	3
Lateral	± (mm)		0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25
Angular	± (degree)		1	1.5	1	1.5	1	1.5	1	1.5
Axial spring stiffness	(N/mm)	C_a	25	15	50	30	72	48	82	52
Lateral spring stiffness	(N/mm)	C_r	475	137	900	270	1200	420	1500	435
Cone Ø (Fanuc-Motor)	(mm)	I	11		16		16		16	
Key width	(mm)	K	4		5		5		5	

ORDERING EXAMPLE	BK4	150	82	20	XX
Model	●				Special designation only (e.g. non-standard bore tolerance)
Size		●			
Overall length mm			●		
Bore D1 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK4 / 150 / 82 / 20 / XX; XX=finely balanced for 25,000 rpm)					

BK5

BLIND MATE WITH CLAMPING HUB

15 - 1,500 Nm

PROPERTIES

FEATURES

- easy installation and removal
- electrically and thermally isolating
- absolutely backlash free assembly


MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** up through size 80 Aluminum, size 150 and up steel

- **Tapered male segment:** high strength plastic

DESIGN

Two clamping hubs, one of which has a tapered male projection for blind mate connection. Brief overloads of up to 1.5x the rated torque are acceptable.

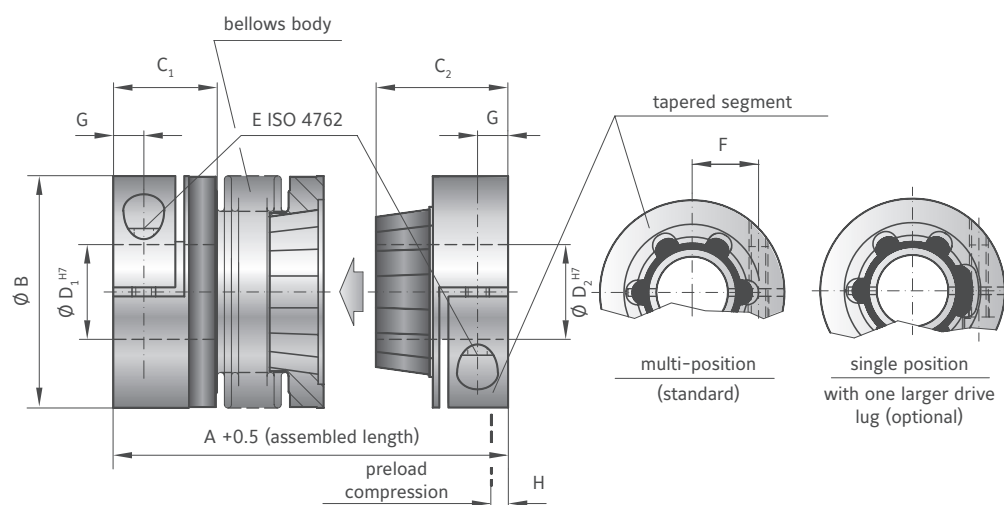

MODEL BK5

SIZE		15	30	60	80	150	300	500	800	1500
Rated torque (Nm)	T_{KN}	15	30	60	80	150	300	500	800	1500
Overall length (inserted) (mm)	$A^{+0.5}$	60 67	71 79	85 95	94 106	95 107	114 128	136 149	150	176
Outside diameter (mm)	B	49	55	66	81	81	110	124	133	157
Fit length (mm)	C_1	22	27	31	36	36	43	51	45	55
Fit length (mm)	C_2	28	33	39	43	43	52	61	74	94
Inside diameter possible from Ø to Ø H7 (mm)	D_1	8-28	10-30	12-35	14-42	14-42	24-60	35-60	40-75	50-80
Inside diameter possible from Ø to Ø H7 (mm)	D_2	8-22	10-25	12-32	14-38	14-38	24-58	35-60	40-62	50-75
Fastening screw ISO 4762	E	M5	M6	M8	M10	M10	M12	M16	2 x M16**	2 x M20**
Tightening torque of the fastening screw (Nm)		8	15	40	50	70	130	200	250	470
Distance between centerlines (mm)	F	17	19	23	27	27	39	41	2 x 48**	2 x 55**
Distance (mm)	G	6.5	7.5	9.5	11	11	13	16.5	18	22.5
Preload compression (mm)	H	0.2 - 1.0	0.5 - 1.0	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	1.0 - 2.0	1.0 - 2.5	0.5 - 1.5
Axial recovery force at maximum pretensioning (N)		20 12	50 30	70 45	48 32	82 52	157 106	140 96	200	650
Moment of inertia (10^{-3} kgm^2)	J_{res}	0.07 0.08	0.14 0.15	0.23 0.26	0.65 0.67	2.2 2.4	7.4 7.9	13.7 14.4	21.5	51.4
Approximate weight (kg)		0.1 0.1	0.3 0.3	0.4 0.4	0.9 0.9	1.8 1.8	4 4	6.5 6.7	9	15.3
Torsional stiffness (10^3 Nm/rad)	C_T	10 8	20 14	38 28	65 43	88 55	225 175	255 245	400	650
Axial* ± (mm)	Max. values	0.5	1	0.5	1	2	1	2	1.5	2
Lateral ± (mm)		0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.3	0.35
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1.5
Lateral spring stiffness (N/mm)	C_r	475	137	900	270	1200	420	920	1550	435

*in addition to maximum allowable pretension **180° opposed in each clamping hub.

ORDERING EXAMPLE	BK5	30	71	18	19	XX
Model	●					Special designation only (e.g. special bore tolerance).
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK5 / 30 / 71 / 18 / 19 / XX; XX=finely balanced for 25,000 rpm)						

BK6

BLIND MATE WITH CONICAL CLAMPING RING

15 - 1,500 Nm

PROPERTIES

FEATURES

- axial mounting possible
- easy installation and removal
- naturally very well balanced due to self centering clamping ring system
- absolutely backlash free assembly

MATERIAL


- **Bellows:** high grade stainless steel
- **Hubs:** steel

- **Tapered male segment:** high strength plastic

DESIGN

Two conical clamping ring hubs, one of which has a tapered male projection for blind mate connection.

Brief overloads of up to 1.5x the rated torque are acceptable.

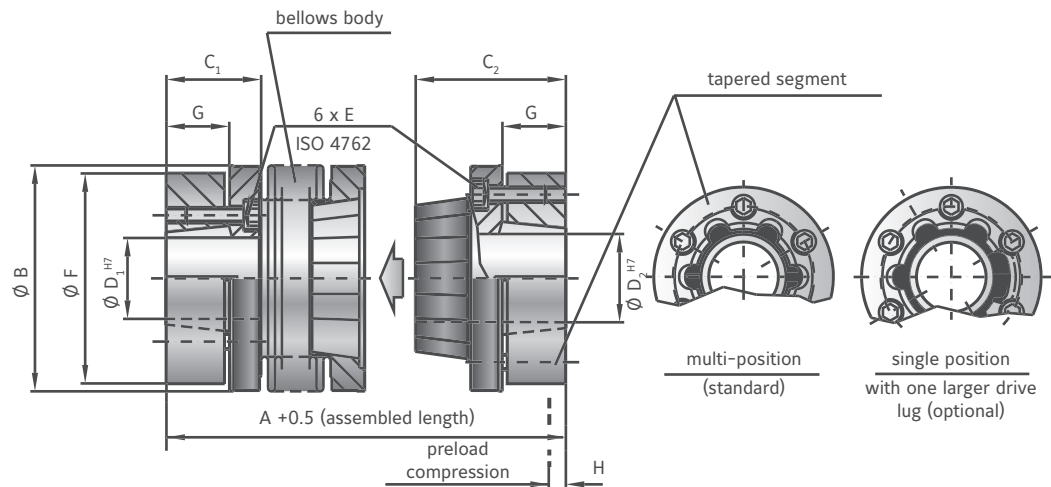

MODEL BK6

SIZE		15		30		60		150		300		500		800		1500	
Rated torque	(Nm)	15		30		60		150		300		500		800		1500	
Overall length (gesteckt)	(mm)	A ^{+0.5}		58 65		68 76		79 89		97 109		113 127		132 145		140 158	
Outside diameter	(mm)	B		49		55		66		81		110		124		133	
Fit length	(mm)	C ₁		13.3		21.5		17.5		30		37		42.5		53	
Fit length	(mm)	C ₂		29		34		39		49.5		59		68		74	
Inside diameter possible from Ø to Ø H7	(mm)	D _{1/2}		10-22		12-24		12-32		15-40		24-56		30-60		40-62	
Fastening screw ISO 4762		E		M4		M5		M5		M6		M8		M8		M10	
Tightening torque of the fastening screw	(Nm)	E		3.5		6.5		8		12		30		32		55	
Diameter of clamping ring	(mm)	F		46.5		51		60		74		102		114		126	
Clamping ring length	(mm)	G		9.5		10.5		11.5		17.5		20		23		27	
Preload compression	(mm)	H		0.2 - 1.0		0.5 - 1.0		0.5 - 1.5		0.5 - 1.5		0.5 - 1.5		1.0 - 2.0		1.0 - 2.0	
Axial recovery force at maximum pretensioning	(N)	H		20 12		50 30		70 45		82 52		157 106		140 96		400	
Moment of inertia (10 ⁻³ kgm ²)		J _{ges}		0.1 0.12		0.2 0.25		0.4 0.45		2.0 2.5		5.4 6.1		8.4 9.1		17.5	
Approximate weight (kg)		J _{ges}		0.3 0.32		0.5 0.52		0.82 0.84		1.6 1.7		4.1 4.2		6.0 6.3		8.1	
Torsional stiffness (10 ³ Nm/rad)		C _T		10 8		20 14		38 28		88 55		225 175		255 245		400	
Axial* ± (mm)		Max. values		0.5 1		0.5 1		0.5 1		1 2		1.5 2		2.5 3.5		3	
Lateral ± (mm)		Max. values		0.15 0.2		0.2 0.25		0.2 0.25		0.2 0.25		0.25 0.3		0.3 0.35		0.35	
Angular ± (degree)		Max. values		1 1.5		1 1.5		1 1.5		1 1.5		1 1.5		1 1.5		1.5	
Lateral spring stiffness (N/mm)		C _r		475 137		900 270		1200 420		1550 435		3750 1050		2500 840		2000	

* in addition to maximum allowable pretension

Higher torques upon request

ORDERING EXAMPLE	BK6	30	76	18	19	XX
Model	●					Special designation only (e.g. special bore tolerance).
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK6 / 30 / 76 / 18 / 19 / XX: XX=finely balanced for 25.000 rpm)						

BK7

WITH EXPANDING SHAFT

15 – 300 Nm



PROPERTIES

FEATURES


- for hollow shaft mounting
- short design saves installation space
- solution for mismatched shaft / bore

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table
- **Expanding mandrel system:** steel

DESIGN

One clamping hub on one end with an expanding shaft on the other end. Brief overloads of up to 1.5x the rated torque are acceptable.

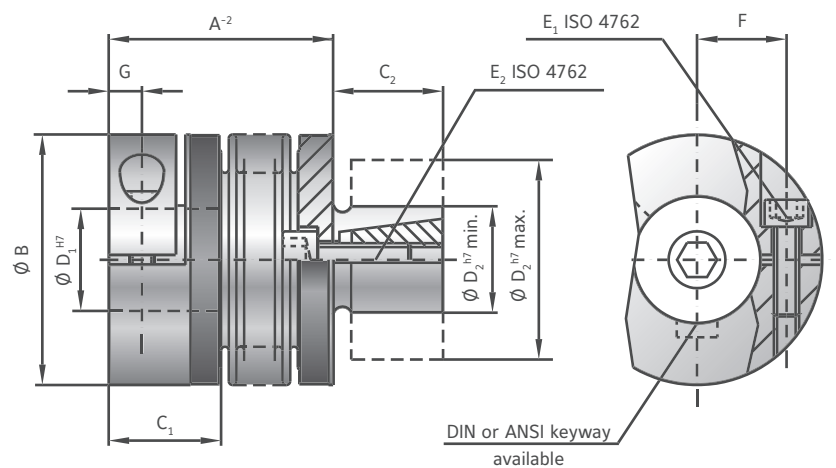

MODEL BK7

SIZE			15		30		60		150		300	
Rated torque	(Nm)	T_{KN}	15		30		60		150		300	
Overall length	(mm)	A^{-2}	45	52	53	61	62	72	71	83	84	98
Outside diameter	(mm)	B	49		55		66		81		110	
Fit length	(mm)	C_1	22		27		31		36		43	
Fit length	(mm)	C_2	20		25		27		32		45	
Inside diameter possible from $\emptyset$ to $\emptyset$ H7	(mm)	D_1	8-28		10-30		12-35		19-42		30-60	
Shaft diameter from $\emptyset$ to $\emptyset$ h7	(mm)	D_2	13-25		14-30		23-38		26-42		38-60	
Fastening screw ISO 4762		$E_{1/2}$	M5		M6		M8		M10		M12	
Tightening torque of the fastening screw	(Nm)	$E_{1/2}$	8		14		38		65		120	
Distance between centerlines	(mm)	F	17		19		23		27		39	
Distance	(mm)	G	6.5		7.5		9.5		11		13	
Moment of inertia (10^{-3} kgm ²)		J_{ges}	0.07	0.08	0.14	0.15	0.23	0.26	2.2	2.4	6.5	8.9
Hub material			Al		Al		Al		steel		steel	
Approximate weight	(kg)		0.15		0.3		0.4		1.7		4	
Torsional stiffness (10^3 Nm/rad)		C_T	20	15	39	28	76	55	175	110	450	350
Axial	± (mm)	Max. values	1	2	1	2	1.5	2	2	3	2.5	3.5
Lateral	± (mm)		0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.25	0.3
Angular	± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5
Axial spring stiffness	(N/mm)	C_a	20	12	50	30	72	48	82	52	105	71
Lateral spring stiffness	(N/mm)	C_r	315	108	730	230	1200	380	1550	435	3750	1050

ORDERING EXAMPLE	BK7	150	71	32	22.23	XX
Model	●					Special designation only (e.g. special bore tolerance).
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Shaft D2 f7					●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK7 / 150 / 71 / 32 / 22.23 / XX; XX=finely balanced for 25,000 rpm)

BK8

WITH ISO FLANGE CONNECTION

50 – 2,600 Nm



PROPERTIES

FEATURES

- ▶ for ISO flange output gearboxes
- ▶ allows for continuous hollow through axis with some right angle gearbox designs
- ▶ compact design


MATERIAL

- ▶ **Bellows:** high grade stainless steel

- ▶ **Hubs:** up through size 300 aluminum, size 1500 and up steel
- ▶ **Adapter flange:** steel

DESIGN

One clamping hub on one end with an integral flange and adapter flange on the other end. Maximum transmittable torque depends on the bore diameter.

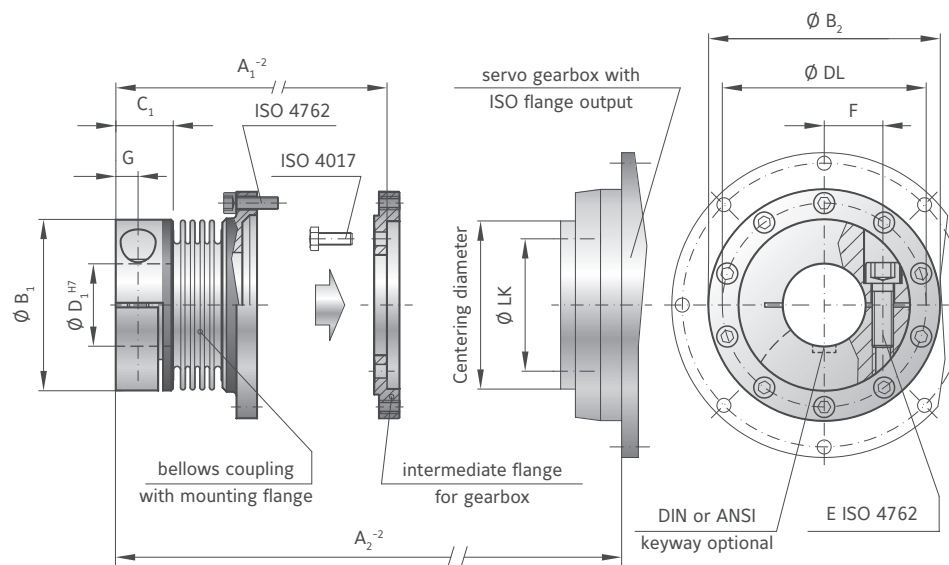

MODEL BK8

SIZE			15	60	150	300	1500
Flange centering diameter	(mm)		40 h7	63 h7	80 h7	100 h7	160 h7
Flange bolt circle / thread $\varnothing$	(mm)		31.5 / 8 x M5	50 / 8 x M6	63 / 12 x M6	80 / 12 x M8	125 / 12 x M10
Maximum torque*	(Nm)		50	210	380	750	2600
Length -2	(mm)	A_1	48.5	67	72	90	140
Length -2	(mm)	A_2	68	97	101	128	190
Outside diameter of hub	(mm)	B_1	49	66	82	110	157
Flange diameter	(mm)	B_2	63.5	86	108	132	188
Fit length	(mm)	C_1	16.5	23	27.5	34	55
Inside diameter possible from $\varnothing$ to $\varnothing$ H7	(mm)	D_1	12-28	14-35	19-42	24-60	50-80
Hub bolt circle	(mm)	DL	56.5	76	97	120	170
Fastening threads	(mm)		10 x M4	10 x M5	10 x M6	12 x M6	16 x M8
Fastening screws ISO 4762			1 x M5	1 x M8	1 x M10	1 x M12	2 x M20
Tightening torque of the fastening screw	(Nm)	E_1	8	45	80	120	470
Distance between centerlines	(mm)	F	1 x 17.5	1 x 23	1 x 27	1 x 39	2 x 55
Distance	(mm)	G	6.5	9.5	11	13	22.5
Approximate weight	(kg)		0.3	0.7	1	2.8	10
Moment of inertia	(10^{-3} kgm ²)	J_{ges}	0.15	0.65	1.3	5.5	45
Lateral	$\pm$ (mm)		0.25	0.25	0.25	0.25	0.25
Angular	$\pm$ (degree)	Max. values	1	1	1	1	1
Axial	$\pm$ (mm)		1	1.5	2	2.5	3

* maximum torque transmittable only for brief periods and requires maximum bore for clamping strength

ORDERING EXAMPLE	BK8	60	22.23	67	XX
Model	●				
Size		●			
Bore D1 H7			●		
Overall length mm				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK8 / 60 / 22.23 / 67 / XX; XX=anodized hubs)					

Special designation only
(e.g. special bore tolerance).

