


# Metal Bellows Couplings

## RINGFEDER® GWB CKN

### Metal bellows coupling with flange

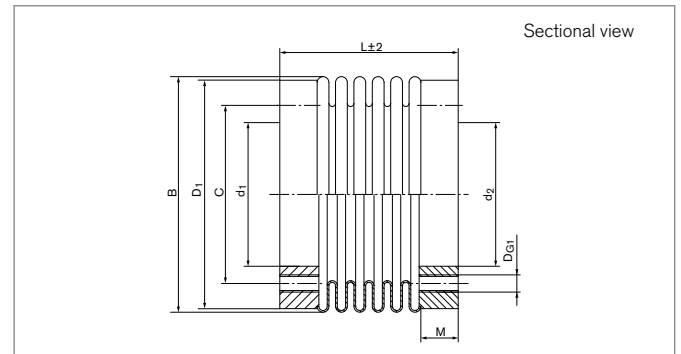

Size	L	d <sub>1</sub>	d <sub>2</sub>	B	C	D <sub>1</sub>	M
	mm	mm	mm	mm	mm	mm	mm
18	36	22	22	46	31	46	6
18	44	22	22	46	31	46	6
30	30	28	28	56	37	55	7
30	38	28	28	56	37	55	7
60	41	38	38	66	46	64	10
60	51	38	38	66	46	64	10
80	52	50	50	82	62	80	13
80	62	50	50	82	62	80	13
150	52	50	50	82	62	80	13
150	62	50	50	82	62	80	13
200	51	50	50	90	62	90	13
200	63	50	50	90	62	90	13
300	55	50	65	110	80	109	13
300	66	50	65	110	80	109	13
500	61	70	70	122	94	119	16
500	72	70	70	122	94	119	16
800	130	85	85	157	110	152	18
1400	130	85	85	157	110	152	18
3000	130	100	100	199	140	180	25
5000	143	145	145	250	190	230	25

To continue see next page

### Metal Bellows Couplings RINGFEDER® GWB CKN

Size	T	$n_{max}$	$C_{Tdyn}$	$\Delta K_a$	$\Delta K_w$	$\Delta K_r$	J	$D_{G1}$	$T_{A1}$	Gw
	Nm	1/min	$10^3$ Nm/rad	mm	degree	mm	$10^{-3}kgm^2$	mm	Nm	kg
18	22	13900	8	0,5	1,5	0,2	0,05	6 x M5	5,9	0,06
18	22	13900	6	0,5	1,5	0,2	0,05	6 x M5	5,9	0,06
30	36	11000	35	0,4	1,0	0,1	0,09	6 x M5	5,9	0,12
30	36	11000	25	0,5	1,5	0,2	0,09	6 x M5	5,9	0,12
60	75	9000	75	0,4	1,0	0,1	0,16	6 x M6	10	0,19
60	75	9000	50	0,5	1,5	0,2	0,16	6 x M6	10	0,19
80	96	7100	130	0,4	1,0	0,2	0,43	6 x M6	10	0,36
80	96	7100	75	0,5	1,5	0,2	0,43	6 x M6	10	0,36
150	180	7100	150	0,4	1,0	0,2	0,43	6 x M6	15	0,36
150	180	7100	100	0,5	1,5	0,2	0,43	6 x M6	15	0,36
200	240	6600	170	0,4	1,0	0,2	0,80	6 x M6	18	0,48
200	240	6600	120	0,5	1,5	0,2	0,80	6 x M6	18	0,48
300	360	5200	500	0,4	1,0	0,2	1,70	6 x M8	25	0,59
300	360	5200	280	0,5	1,5	0,2	1,70	6 x M8	25	0,59
500	600	4600	680	0,5	1,0	0,2	2,30	6 x M8	36	0,88
500	600	4600	310	1,0	1,5	0,2	2,30	6 x M8	36	0,88
800	960	3700	760	1,0	1,5	0,2	11,00	6 x M16	210	3,74
1400	1680	3700	1300	1,0	1,5	0,2	11,00	6 x M16	210	3,73
3000	3000	3700	2800	1,0	1,5	0,2	47,00	6 x M20	365	7,80
5000	5000	3000	4800	1,0	1,5	0,2	119,00	8 x M20	365	11,74

### Explanation

<b>L</b> = Total length	<b><math>n_{max}</math></b> = Max. rotation speed	<b><math>n_{Sc1}</math></b> = Quantity of screws $D_{G1}$
<b><math>d_1</math></b> = Inner diameter	<b><math>C_{Tdyn}</math></b> = Dynamic torsional stiffness	<b><math>D_{G1}</math></b> = Thread
<b><math>d_2</math></b> = Inner diameter	<b><math>C_r</math></b> = Radial spring stiffness	<b><math>T_{A1}</math></b> = Tightened torque of clamping screw $D_{G1}$
<b>B</b> = Bellow outer diameter	<b><math>C_a</math></b> = Axial spring stiffness	<b>Gw</b> = Weight
<b>C</b> = Pitch circle diameter	<b><math>\Delta K_a</math></b> = Max. permissible axial misalignment	
<b><math>D_1</math></b> = Outer diameter	<b><math>\Delta K_w</math></b> = Max. permissible angular misalignment	
<b>M</b> = Max. depth of thread	<b><math>\Delta K_r</math></b> = Max. permissible radial misalignment	
<b>T</b> = Transmissible torque at given $T_A$	<b>J</b> = Total moment of inertia	

### Ordering example

Series/Size	Length	Further details
CKN 150	52	*

\* Stainless steel

More information about  
**RINGFEDER® GWB CKN**  
 on [www.ringfeder.com](http://www.ringfeder.com)

#### Disclaimer of liability

All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right carry out modifications at any time in the interests of technical progress.